



Applications include



- Capturing oil fog, mist, or smoke from exhaust and pressure unloading vents on oil flooded compressors, vacuum pumps and blowers
- Any application requiring Low Delta P coalescing of large air volumes
- Vacuum Freeze Drying
- Vacuum Out - Gasing and Vacuum Coating
- Food Processing
- Nailers/Staplers
- Industrial Vacuum Processes
- Cement & Paper Processing

Design

- Mist Eliminators are designed to meet the demand for:
- Efficient removal of oil-mist carryover from piston or oil flooded rotary compressors
 - Long service life
 - Strength to withstand strenuous operating conditions
 - Protection from oil slugs or compressor Air/ Oil separator failure

Features

- Very Low pressure drop
- Large oil catching efficiency
- Easy field cleaning
- Positive sealing O-rings
- Temperature (continuous)
4°C (40°F) min. 80°C (176°F) max.
- Auto Float Drain is Standard
- Multiple drain Style Options Available
- Pressure Rating of 14 barg (200 psig)

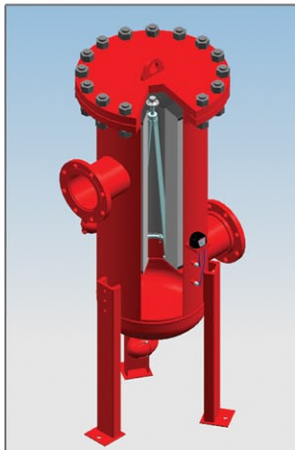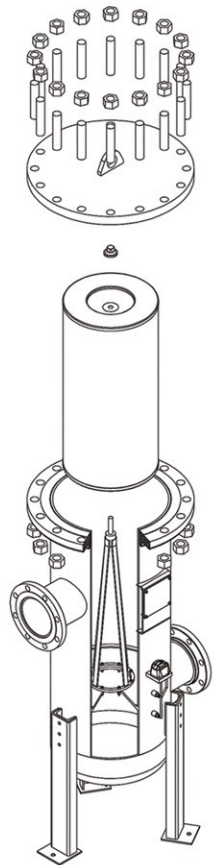

- Removal of particles down to 0.01 micron including coalesced liquid water and oil providing a maximum remaining oil aerosol content of 0.01 ppm
- Increased surface area in a given volume allows low velocity separation of ultra fine oil mist
- Elements are grounded to canister minimizing static electricity problems


Mist Eliminator Element

- Ultra low pressure drop reduces energy costs.
- Positive gasket seals eliminate media bypass
- Filter change out differential 2.5 psig (170 mbar)
- True Air / Oil Separator
- Long service life



Technical specifications

Model	Drain Port Size	Inlet/Outlet Port Size	Flow Rate		Max. working pressure (barg)	Housing Dimensions (mm)							
			(m³/h)	(scfm)		A	B	C	D	ØE	ØF	G	H
ELM-150	1/2"	DN50	255	150	14	500	1003	209	459	203	103	305	330
ELM300	1/2"	DN50	510	300	14	500	1105	209	559	203	103	407	435
ELM-600	1/2"	DN50	1020	600	14	500	1461	209	916	203	103	762	790
ELM-800	1/2"	DN80	1360	800	14	500	1655	279	1084	203	103	915	950
ELM-1200	1/2"	DN80	2040	1200	14	600	1520	281	931	254	103	762	790
ELM-1600	1/2"	DN80	2720	1600	14	600	1671	281	1086	254	103	915	950
ELM-2100	1/2"	DN100	3570	2100	14	700	1575	335	953	300	129	762	790
ELM-2750	1/2"	DN100	4675	2750	14	700	1726	335	1100	300	129	915	950
ELM-4200	1/2"	DN150	7140	4200	14	800	1670	393	983	365	181	762	790
ELM-6000	1/2"	DN150	10200	6000	14	800	1925	393	1238	365	181	950	1045
ELM-8000	1/2"	DN200	13600	8000	14	850	2020	417	1277	386	233	1016	1045
ELM-10000	1/2"	DN250	17000	10000	14	1000	2118	417	1307	407	337	1016	1045
ELM-12000	1/2"	DN300	20400	12000	14	1000	2688	497	1847	437	337	1524	1550

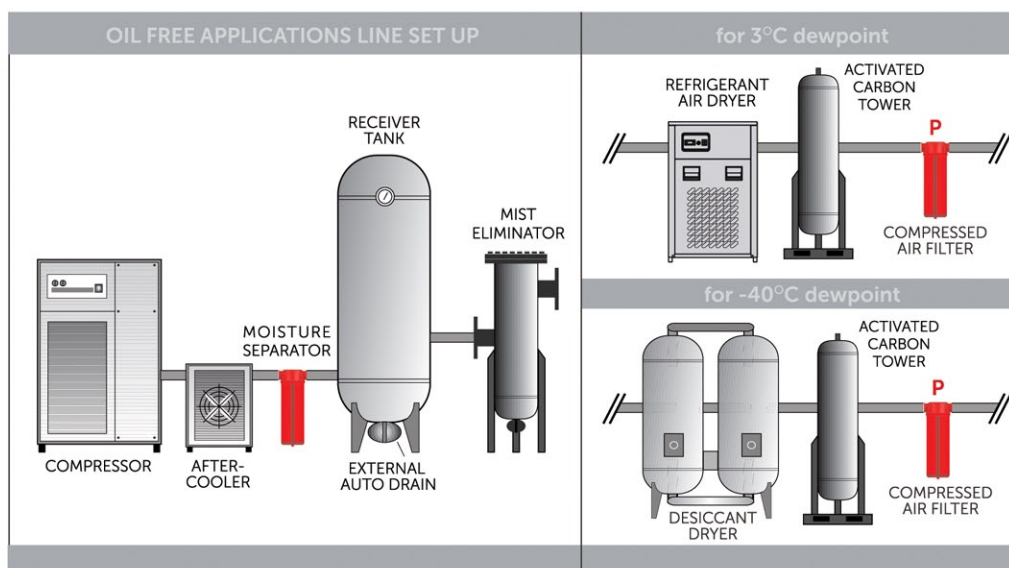

2

Correction Factor

Operating Pressure (barg)	1	3	5	7	9	11	13	14
PSIG	15	44	73	100	131	160	189	200
Correction Factor	0,5	0,71	0,87	1	1,12	1,22	1,32	1,38

For maximum flow rate, multiply model flow rate show in the above table by the correction factor corresponding to the working pressure.

DRAIN TYPE
Electro - adjustable
External float type
Zero-loss Drain
Manual

